


Adaptador F.o. Ideal Mm St/sc Duplex

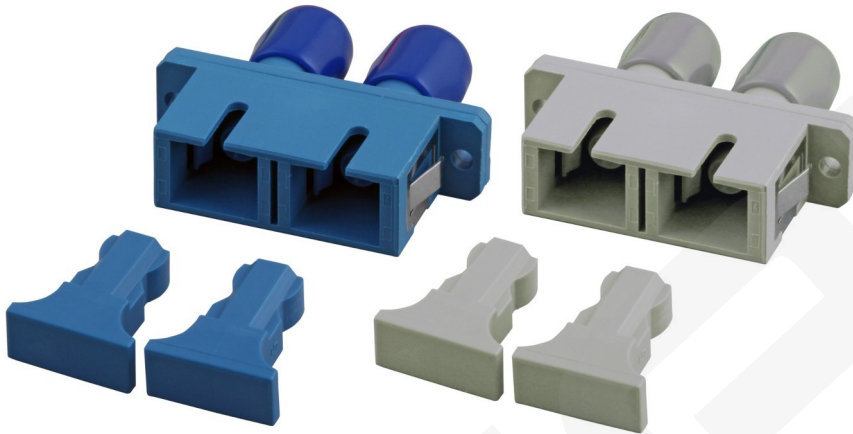

General data

ST / SC Duplex Adapter with Plastic Housing hybrid adapter

Allgemeine Daten

Type of fastening	Screw/snap in
Internal Shutter	False
Accessories	Self-Tapping Screw
Insertion loss 1310nm	-
Type of housing	With flange

Mechanische Eigenschaften

Material housing	Plastic
Material sleeve	Ceramics
Dust cover	True
Construction type	SC Duplex

Kabelaufbau

Type of connector connection 2	SC duplex
Type of connector connection 1	ST-Duplex

Abmessungen

Height	9.4 mm
Width	34.7 mm
Length	28.4 mm

Adaptador F.o. Ideal Mm St/sc Duplex

Umgebungsbedingungen

Operating Temperature	-40 - 75 °C
Storage Temperature	-55 - 85 °C

Available variants

ArtNr.	Bezeichnung	Colour	Insertion loss 1310nm	Insertion loss 850nm	Model	Suitable for type of fibre
53305.31	ST/SC duplex adapter multimode sleeve ceramic	beige	-	< 0.15 dB	PC	Multi mode
53320.3	ST/SC duplex adapter Single mode, sleeve ceramic	blue	< 0.15 dB	-	PC	Single mode

Drawings

