

Bastidor de pared 2u 528x89 Mm (ajustable en fondo 225-345 Mm)



General data

19" wall bracket with adjustable mounting depth (225 .. 345 mm)

Material steel


Paint finish RAL7035, light grey / RAL9005, jet black / RAL9010, pure white

Allgemeine Daten

Modular spacing	482.6 mm (19 inch)
With front door	True
Type of ventilation	Passive
Demountable	True
Surface finishing	powder coating
Number of cartons	1
With roof plate	True
Model	Other
Degree of protection (IP)	IP00
Number of doors	0
Mounting level	Front side
With sidewall	True
With earthing	True
Material	steel
Type of profile rail	L-shaped


Bastidor de pared 2u 528x89 Mm (ajustable en fondo 225-345 Mm)

Drawings

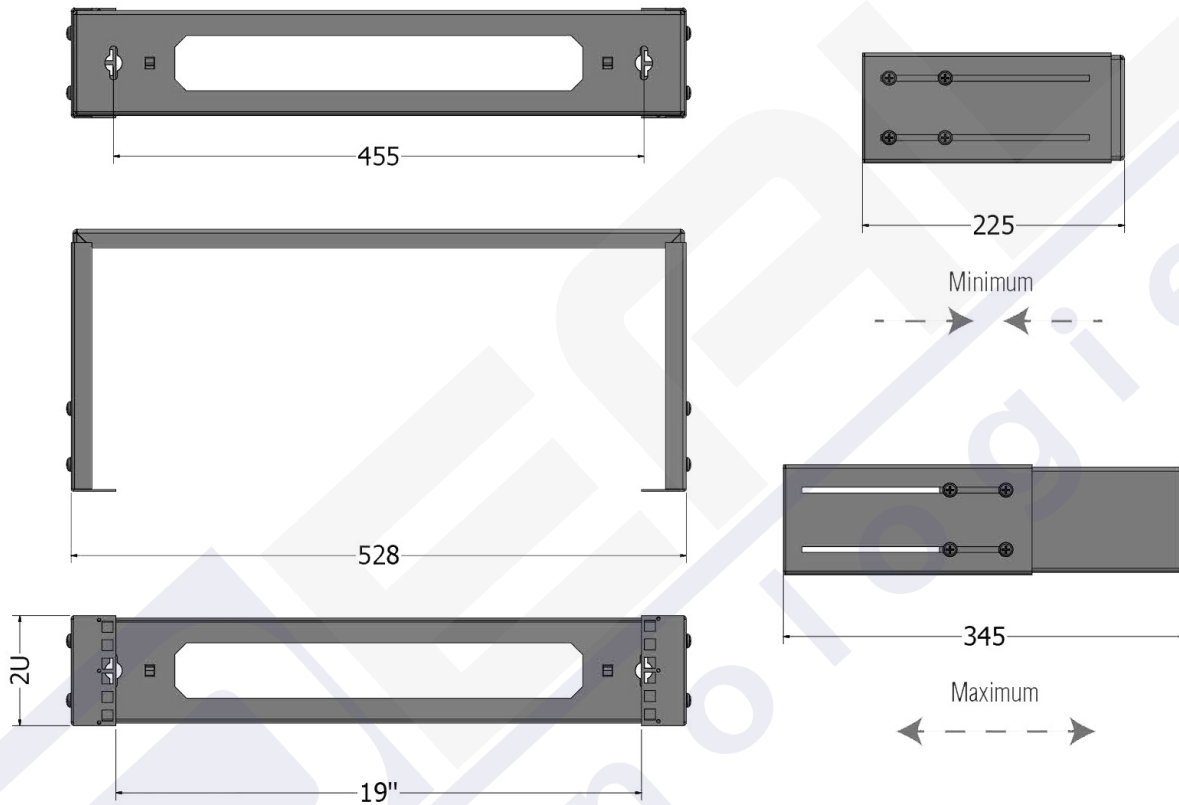


Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.

Bastidor de pared 2u 528x89 Mm (ajustable en fondo 225-345 Mm)

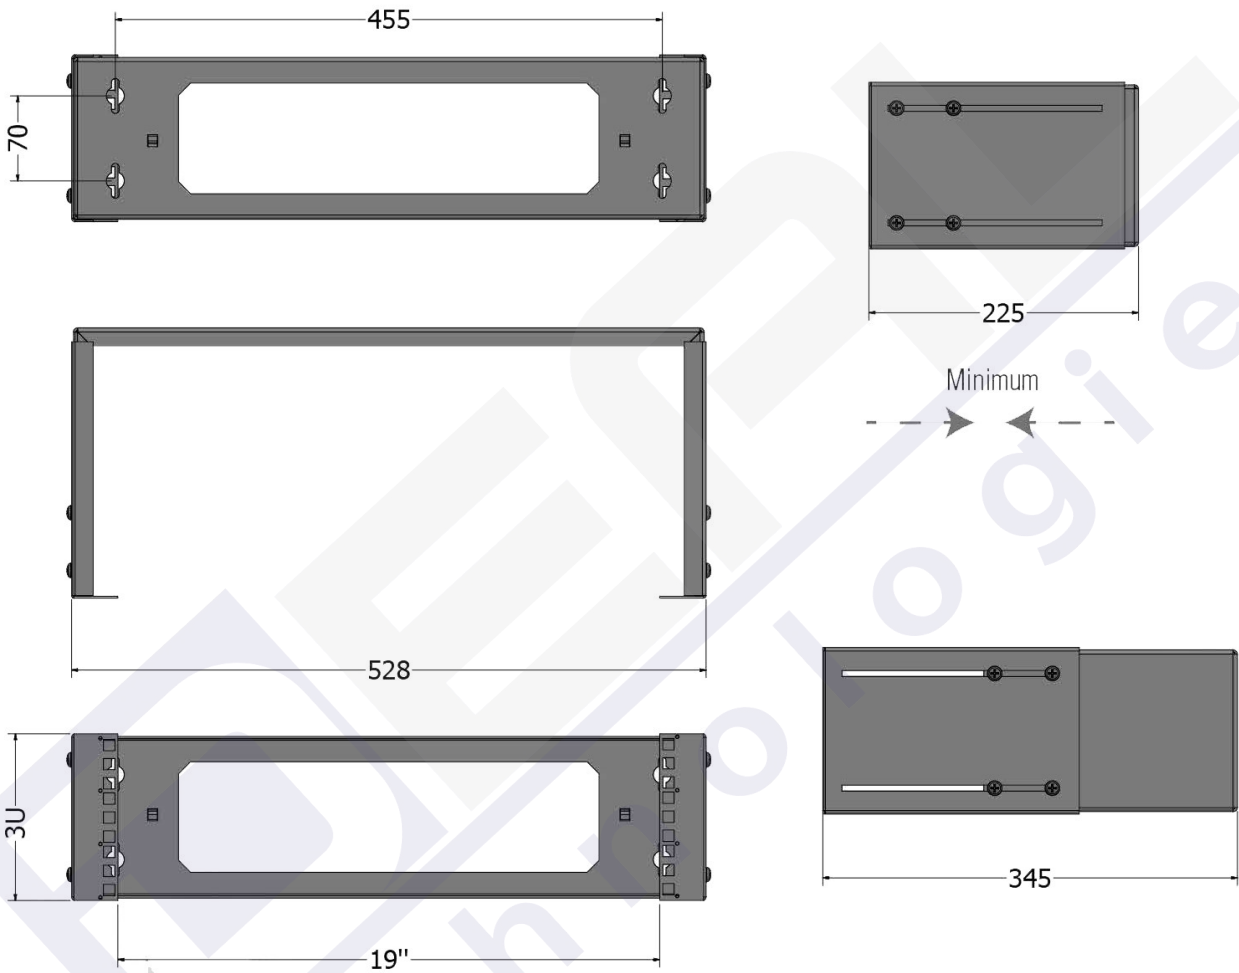

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.

Bastidor de pared 2u 528x89 Mm (ajustable en fondo 225-345 Mm)

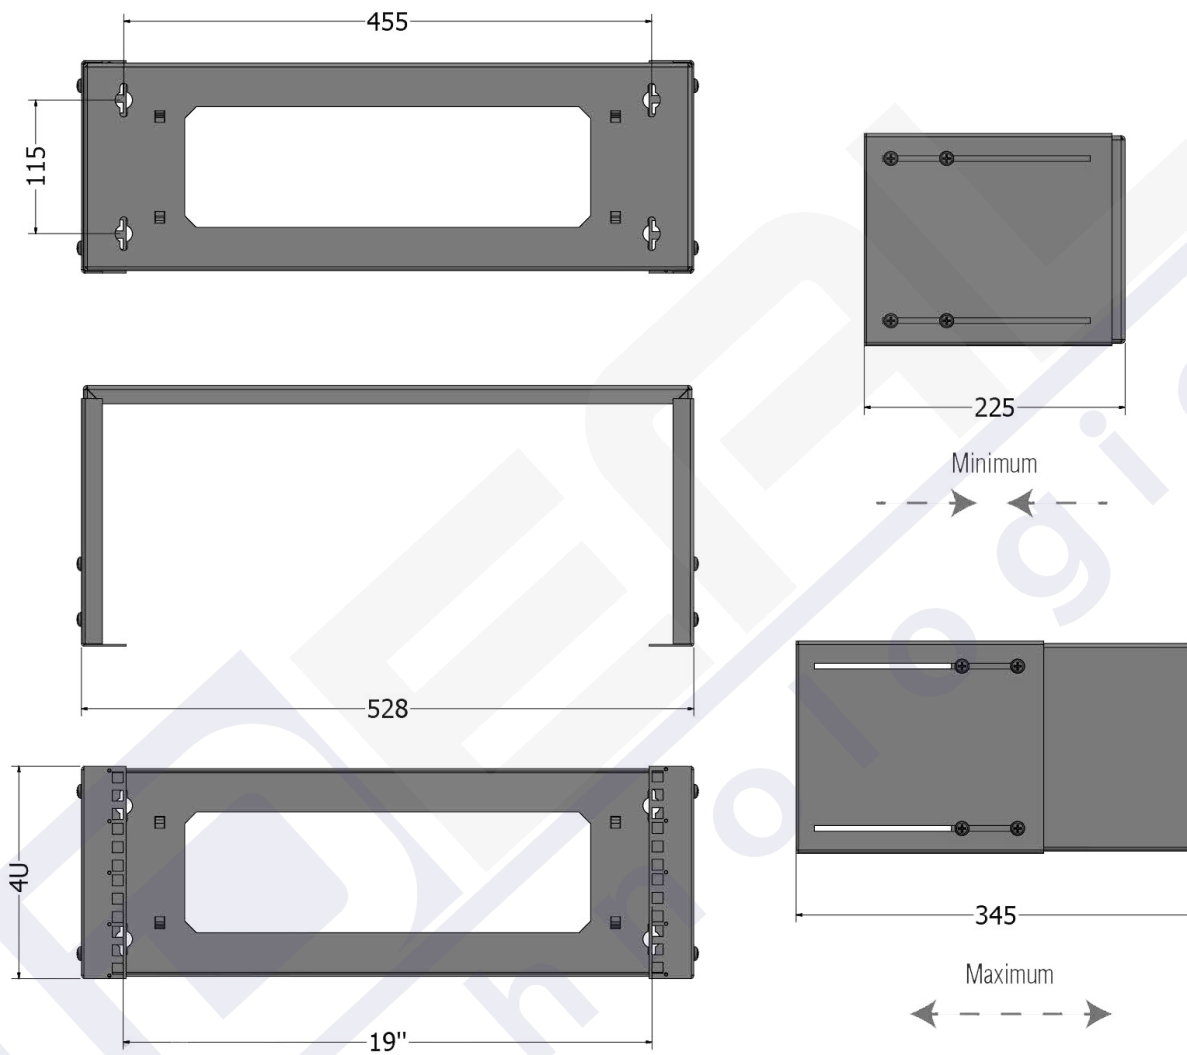

Bastidor de pared 2u 528x89 Mm (ajustable en fondo 225-345 Mm)

