

Bastidor de pared 9u 528x400 Mm (ajustable en fondo 225-345 Mm)



General data

19" wall bracket with adjustable mounting depth (225 .. 345 mm)
Material steel
Paint finish RAL7035, light grey / RAL9005, jet black / RAL9010, pure white


Allgemeine Daten

Modular spacing	482.6 mm (19 inch)
Type of ventilation	Passive
Demountable	True
Surface finishing	powder coating
With front door	False
Number of cartons	1
With roof plate	True
Model	Other
Degree of protection (IP)	IP00
Number of doors	0
Mounting level	Front side
With sidewall	True
With earthing	True


Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.

Bastidor de pared 9u 528x400 Mm (ajustable en fondo 225-345 Mm)

Drawings

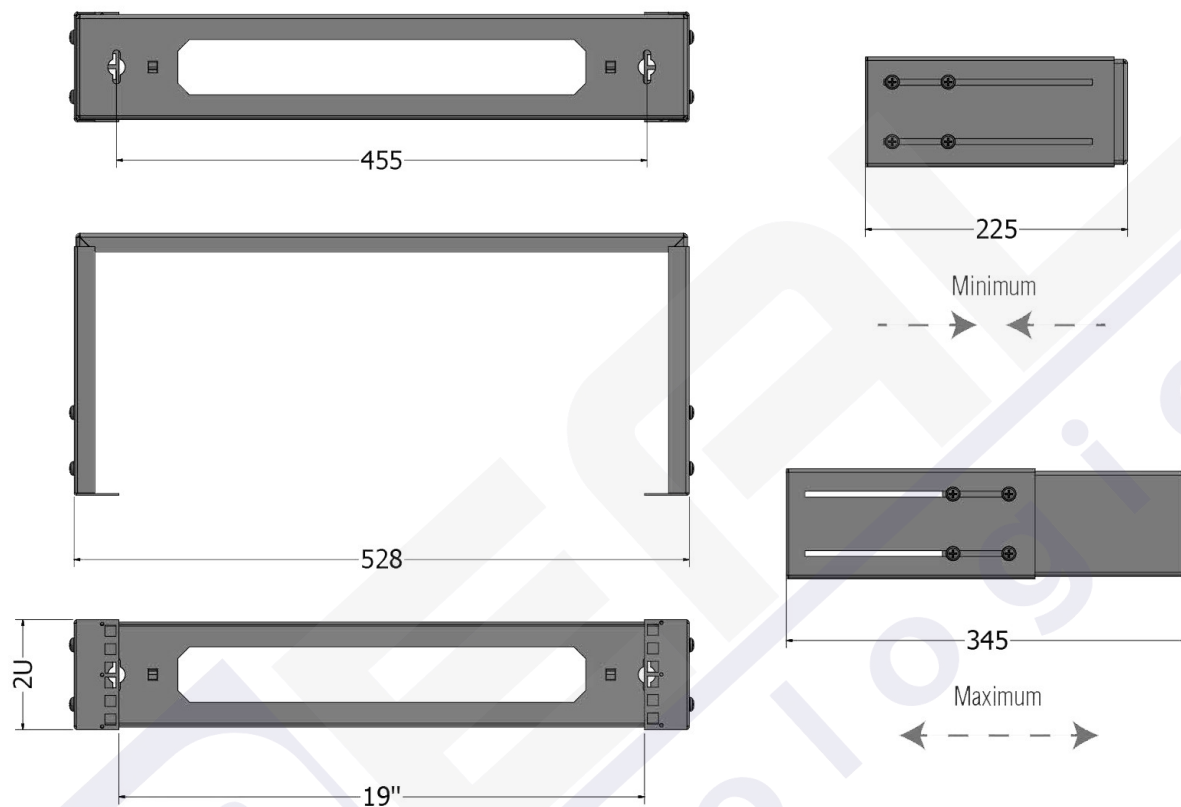


Bastidor de pared 9u 528x400 Mm (ajustable en fondo 225-345 Mm)

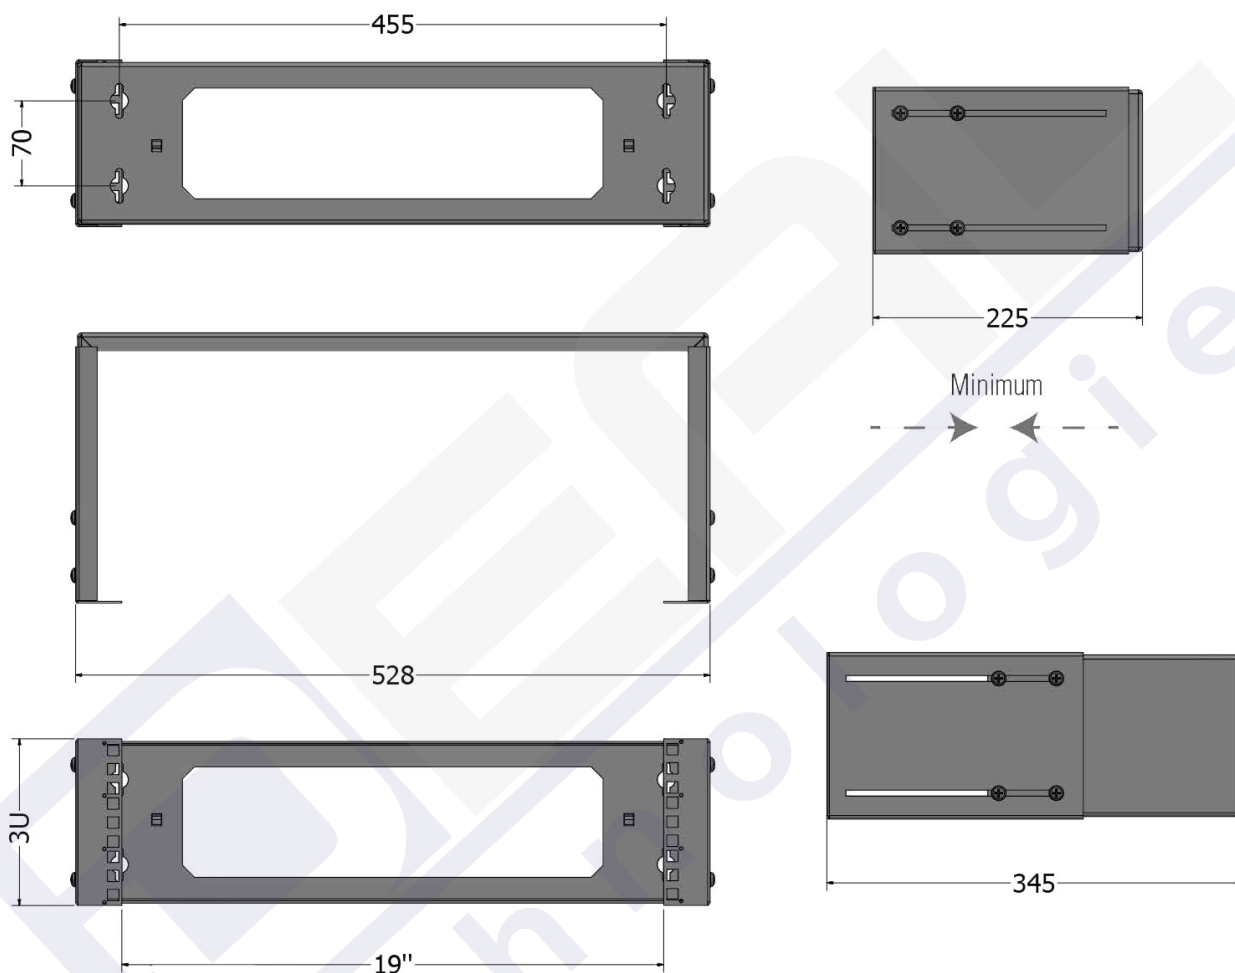


Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.


Bastidor de pared 9u 528x400 Mm (ajustable en fondo 225- 345 Mm)

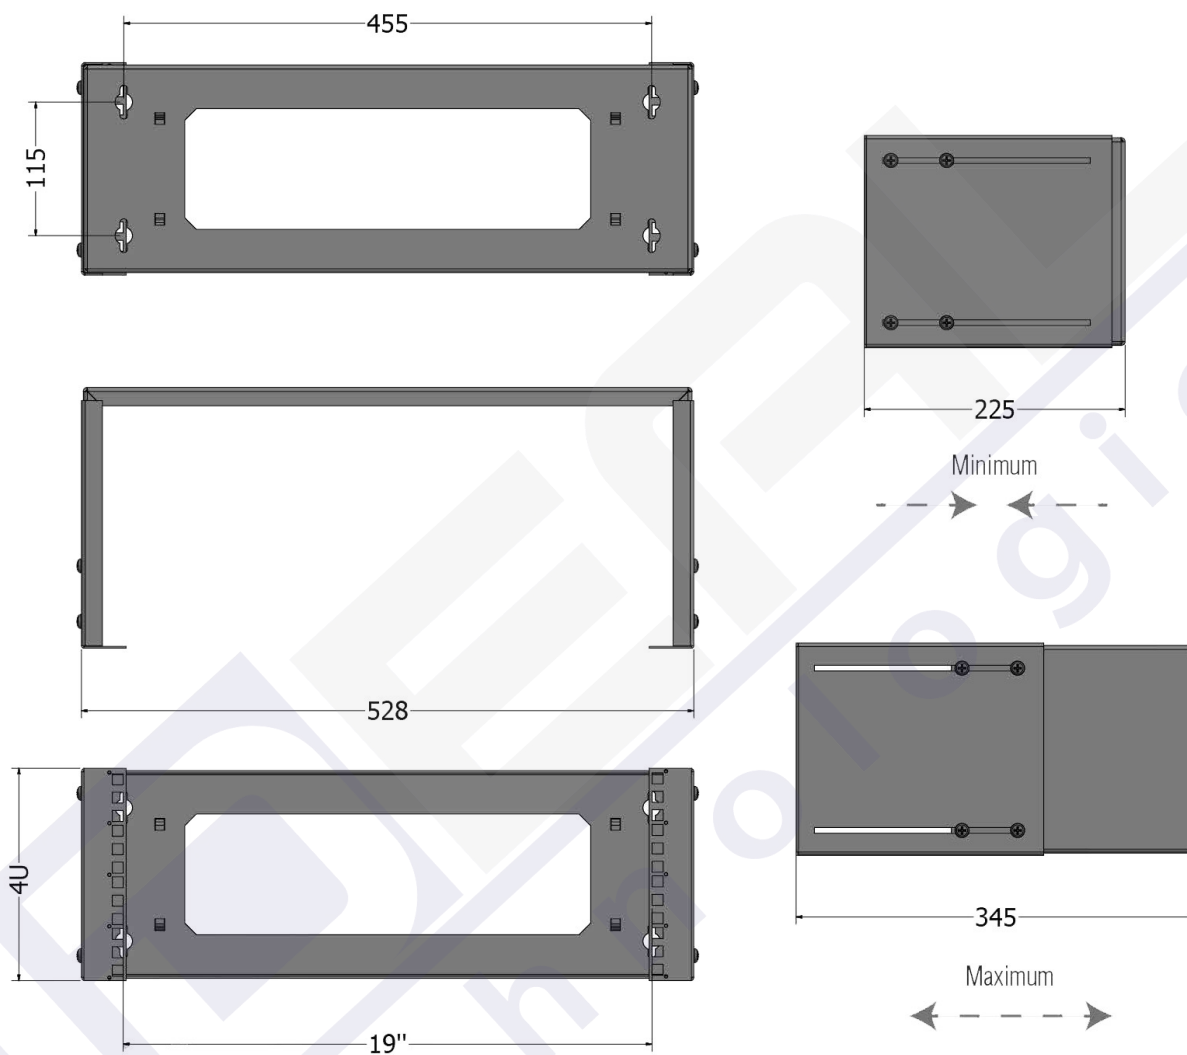

Bastidor de pared 9u 528x400 Mm (ajustable en fondo 225-345 Mm)

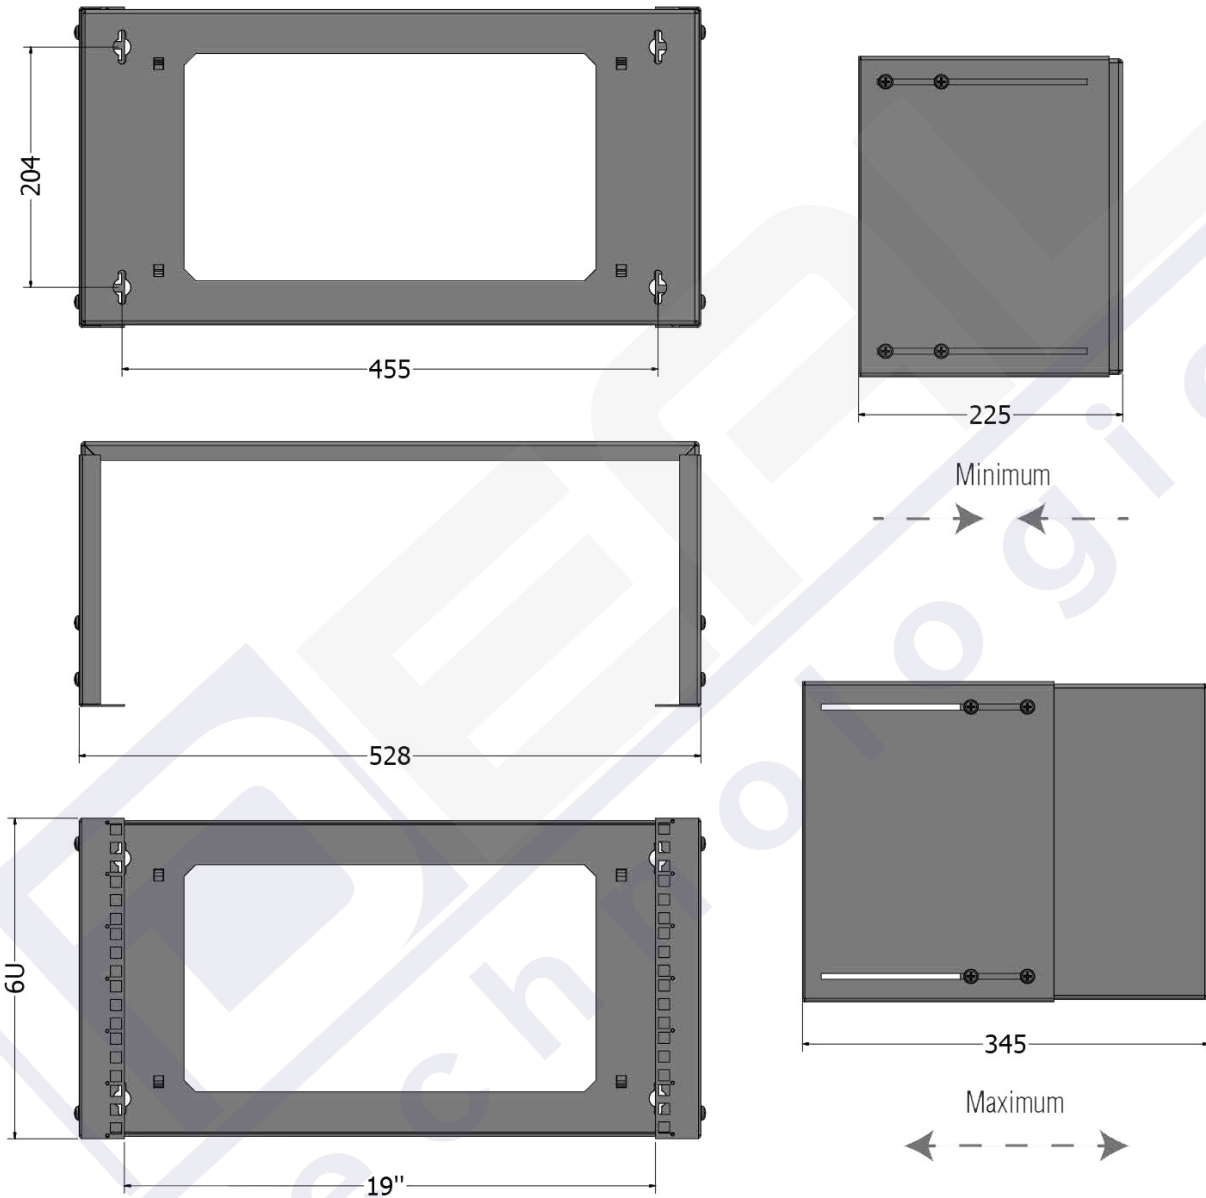

Bastidor de pared 9u 528x400 Mm (ajustable en fondo 225-345 Mm)

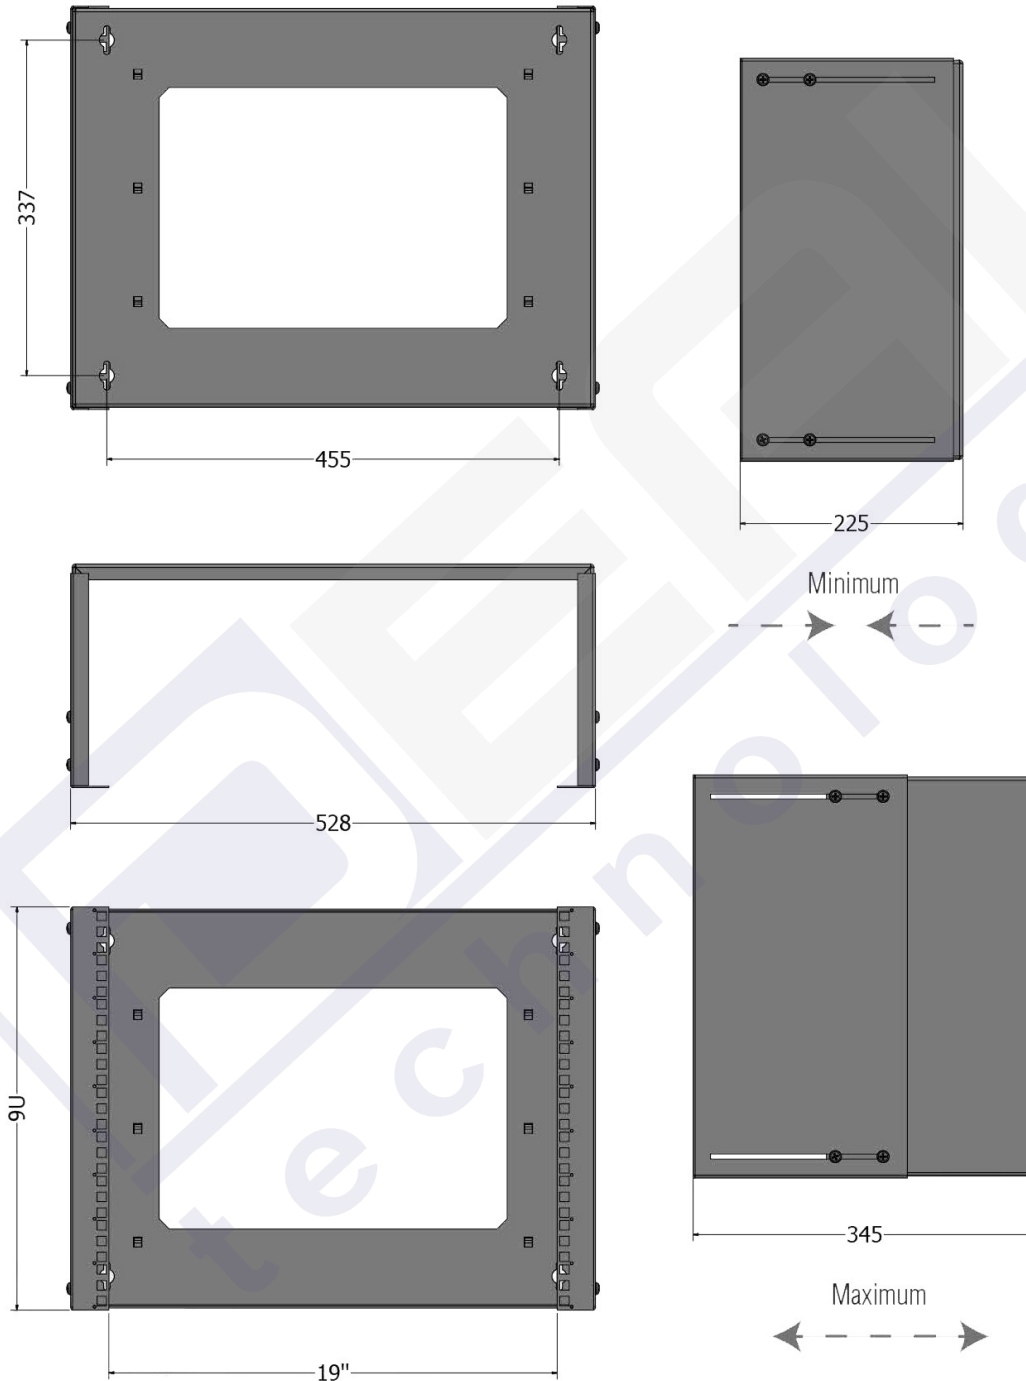

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.