


# Conector Utp H Ecolan Cat-6 180° Toolless

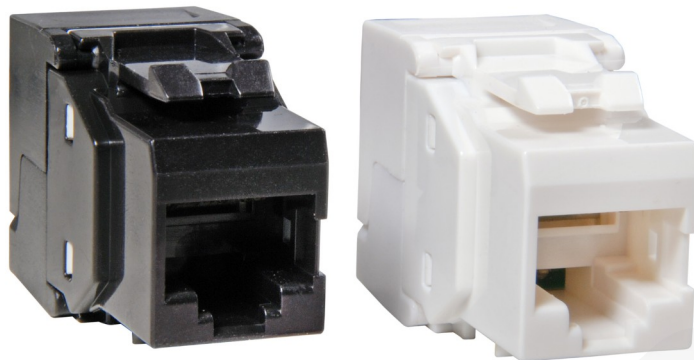

## General data

### Specifications:

Plastic housing PC+ABS  
Compact cable presorter for AWG 24/1 .. 22/1  
Pair management according to TIA 568A /B colour codes  
Appropriate for distribution panels and frames with keystone slots

### Scope of delivery:

1 x RJ45 keystone, Cable coder, 1 x hinged dust cover, 1 x cable tie, 1 x mounting instruction

## Allgemeine Daten

Type of connector	RJ45 8(8)
Current Rating	2 A
Model	jack
Suitable for litz wire conductor	True
Suitable for solid core	True
AWG-range	24 - 22
Suitable for flat cable	False
Connection type	Insulation displacement connector
Max. cable diameter	8.5 mm
Special tool necessary	False
Suitable for round cable	True
Category	6
For UAE suitable	True
Complaint to UL94	V-0

## Mechanische Eigenschaften

Mating cycles	≥ 750
Housing material	Plastic
Dust cover	true
Contact coating	50 μ"

# Conector Utp H Ecolan Cat-6 180° Toolless

## Umgebungsbedingungen

Temperature range	-40 - 66 °C
-------------------	-------------

## Elektrische Eigenschaften

Insulation Resistance	$\geq 500 \text{ M}\Omega$
Contact Resistance	$\leq 20 \text{ m}\Omega$
Dielectric Withstanding Voltage	1000 V AC 60Hz
screened	False
4PPOE certified	True

