




Product Structure Diagram

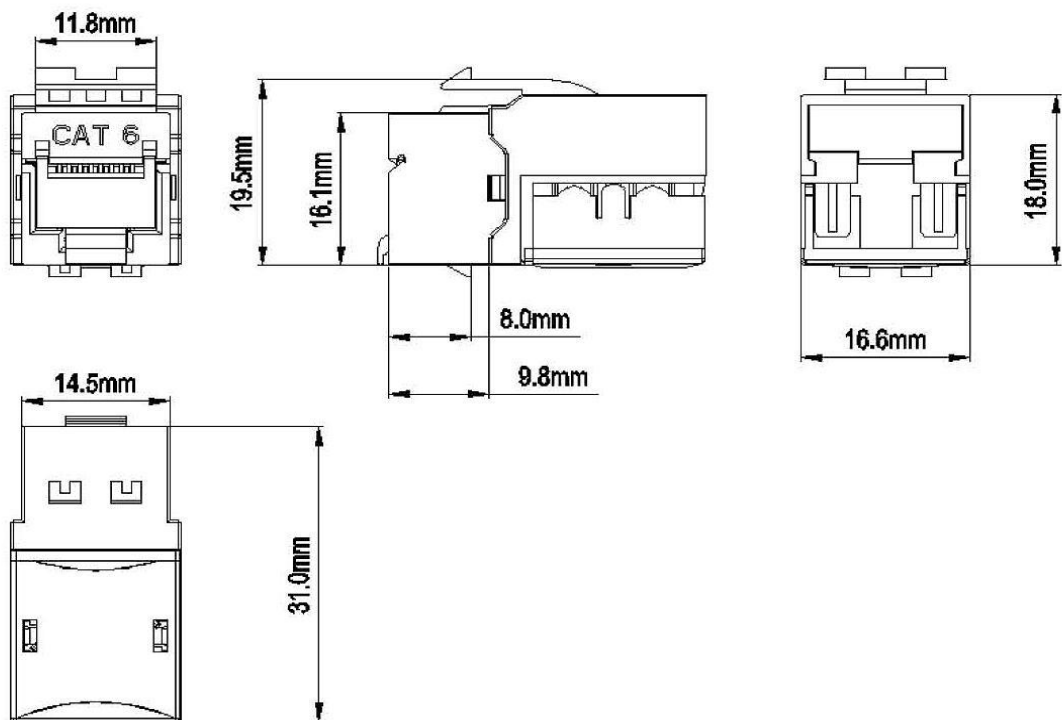

Product Description

Cat6 keystone jacks surpass all Cat6 performance requirements, comply with Gigabit Ethernet application system, suit for connection between FD to the outlet of the work area, providing up to 550MHz available bandwidth.



Technical Characteristics

- The Cat6 keystone jack has unique exterior design, simple and compact.
- The unique designed PCB reduces EMI/RFI interference, with low attenuation loss and high return loss
- Meet the requirements of both T568A and T568B, with clear color labels.
- Solid and anticorrosive phosphor bronze IDC guarantees 250 terminations.
- Accept 23-26 AWG wires; phosphor bronze contact with 50μ” gold plating, with a durability of 1500 matching recycles.
- Able to be equipped with a shutter for dust proof.
- With backward compatibility of Cat5E or lower level.

Description	Parameter
Contact resistance(max)	100mΩ
Insulation resistance(min)	500MΩ
Return loss(dB)	2.4dB

Packaging

P/N	Description	Color	Inner Box	Outer Box	CTN SIZE(L*W*H)	Weight
CNHK69	Cat6 unshielded keystone jack	White	25PCS	250PCS	53.5*31.3*23.4	3.8kg