
Lat. F.o. 62,5/125 Om1 Duplex Lc-sc



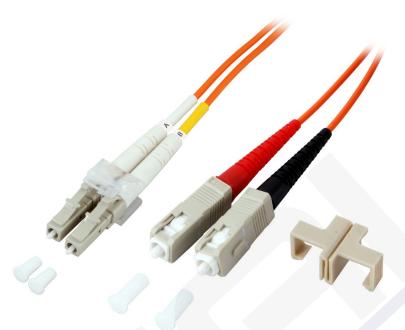

General data

Fiber jumper are well defined components in international standard of structured cabling ISO/IEC11801. Due to many different network protocols created in the last 25 years, also a wide range of connectors had been developed. Some of them are still important today: LC, SC, E2000®, MPO/MTP.

Fiber jumper (patchcord) are defined as shortest connection between passive interface and active deviceport, regarding structured cabling standard. Rating of performance, known as category, as well as performance of total transmission channel, known as link class, Similar descriptions for patchcords: Connection cable, drop cable, adapter cable, interconnecting cord, Jumper

Features of EFB fiber optic patch cables

Tension relief reinforced with aramid yarn

Halogen-free and flame-retardant sheath according to IEC-60754-2, IEC-60332-1 and IEC-61034 EFB fiber optic connectors meet the minimum quality class Grade B/2 according to IEC-61753-1 for singlemode and Grade A/1 for multimode according to IEC 61753-122-2 (UPC cut)

100% tested and with individual measurement report

Allgemeine Daten	
Colour outer sheath	orange
Connector colour 2	beige
Halogen free	acc. IEC60754-1
APC-version	False
Number of fibres	2
Material outer sheath	LSZH
Cable type	I-V(ZN) H
Anti-kink sleeve	put-on

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.

Lat. F.o. 62,5/125 Om1 Duplex Lc-sc



Category	OM1
Connector colour 1	beige

Mechanische Eigenschaften	
Min. Bending radius (Dynamic)	20xOD
Max. Tension	160 N
Min. Bending radius (Static)	10xOD
Cable Ø	2.0 mm

Kabelaufbau

Type of connector connection 2	SC duplex
Cable Construction	Duplex
Type of connector connection 1	LC-Duplex
Fibre type	Multi mode 62.5/125

Kabelmantel

Flame retardant	According to EN 50265-2-1
Halogen free (according to EN 50267-2-3)	True
Low smoke	acc. IEC61034-1

Umgebungsbedingungen


Storage Temperature	-20 - 85 °C
Operating Temperature	-20 - 75 °C

Übertragungstechnische Eigenschaften

Quality class multimode A/1 according to IEC-61753-222-2

Normen, Zulassungen, Zertifizierungen

Cable Conform to Standard IEC 60793-2

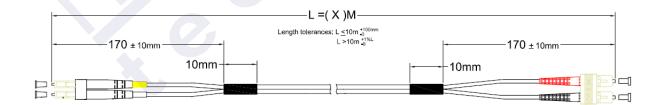

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.