### Lat. F.o. 9/125 Os2 Duplex Lc/pc-Sc/pc





#### **General data**

Fiber jumper are well defined components in international standard of structured cabling ISO/IEC11801. Due to many different network protocols created in the last 25 years , also a wide range of connectors had been developed. Some of them are still important today: LC, SC, E2000®, MPO/MTP.

Fiber jumper (patchcord) are defined as shortest connection between passive interface and active deviceport, regarding structured cabling standard. Rating of performance, known as category, as well as performance of total transmission channel, known as link class, Similar descriptions for patchcords: Connection cable, drop cable, adapter cable, interconnecting cord, Jumper

### Features of EFB fiber optic patch cables

Tension relief reinforced with aramid yarn

Halogen-free and flame-retardant sheath according to IEC-60754-2, IEC-60332-1 and IEC-61034 EFB fiber optic connectors meet the minimum quality class Grade B/2 according to IEC-61753-1 for singlemode and Grade A/1 for multimode according to IEC 61753-122-2 (UPC cut) 100% tested and with individual measurement report

Allgemeine Daten	
Connector colour 2	blue
Halogen free	acc. IEC60754-1
Connector colour 1	blue
APC-version	False
Number of fibres	2
Material outer sheath	LSZH
Category	OS2 acc. to ITU-T G.652.D
Cable type	I-V(ZN) H

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.

# Lat. F.o. 9/125 Os2 Duplex Lc/pc-Sc/pc




Anti-kink sleeve	put-on
Colour outer sheath	yellow
Bend optimized fiber	no
Mechanische Eigenschaften	
Min. Bending radius (Dynamic)	20xOD
Max. Tension	160 N
Min. Bending radius (Static)	10xOD
Cable Ø	2.0 mm
Kabelaufbau	
Type of connector connection 2	SC duplex
Cable Construction	Duplex
Fibre type	Single mode 9/125
Type of connector connection 1	LC-Duplex
Kabelmantel	
Kabelmantel Flame retardant	According to EN 50265-2-1
Kabelmantel	
Kabelmantel Flame retardant Halogen free (according to EN 50267-2-3)	According to EN 50265-2-1 True
Kabelmantel Flame retardant Halogen free (according to EN 50267-2-3) Low smoke	According to EN 50265-2-1 True
Kabelmantel   Flame retardant   Halogen free (according to EN 50267-2-3)   Low smoke   Umgebungsbedingungen	According to EN 50265-2-1 True acc. IEC61034-1
Kabelmantel   Flame retardant   Halogen free (according to EN 50267-2-3)   Low smoke   Umgebungsbedingungen   Storage Temperature	According to EN 50265-2-1 True acc. IEC61034-1 -20 - 85 °C
Kabelmantel   Flame retardant   Halogen free (according to EN 50267-2-3)   Low smoke   Umgebungsbedingungen   Storage Temperature   Operating Temperature	According to EN 50265-2-1 True acc. IEC61034-1 -20 - 85 °C
Kabelmantel   Flame retardant   Halogen free (according to EN 50267-2-3)   Low smoke   Umgebungsbedingungen   Storage Temperature   Operating Temperature   Übertragungstechnische Eigenschaften   Quality class singlemode	According to EN 50265-2-1 True acc. IEC61034-1 -20 - 85 °C -20 - 75 °C
Kabelmantel   Flame retardant   Halogen free (according to EN 50267-2-3)   Low smoke   Umgebungsbedingungen   Storage Temperature   Operating Temperature   Übertragungstechnische Eigenschaften	According to EN 50265-2-1 True acc. IEC61034-1 -20 - 85 °C -20 - 75 °C

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.

# Lat. F.o. 9/125 Os2 Duplex Lc/pc-Sc/pc



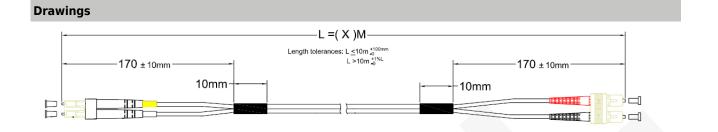

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.