

Panel Utp Ecolan 24 Rj45 Cat-6 C/ Bandeja



General data

The high quality of the unshielded Cat.6 RJ45 ECOLAN® patch panel ensures excellent performance for 5 Gigabit Ethernet applications.

19 "mounting, 1U

24 ports

LSA connection strip for installation cable AWG26..AWG22

Color code according to TIA / EIA 568 A / B

Allgemeine Daten

Type of connector	RJ45 8(8)
Colour code	acc. TIA/EIA 568A/B
Mounting method	482.6 mm (19 inch) mounting
Number of height units	1 U
Cross section	AWG 26 - AWG 22
Connection type	LSA
Current Rating	1.8 A
Complaint to UL94	V-0
Category	6

Mechanische Eigenschaften

Material LSA contacts	Phosphor bronze, tinned
Housing material LSA-terminal	PC
Insertion force	20 N
Housing material of RJ45 jacks	PBT
Durability LSA contacts	200
Contact coating	50 μ" gold plated
Housing material Panel	SPCC Steel, 1,2mm

Panel Utp Ecolan 24 RJ45 Cat-6 C/ Bandeja

Mating cycles RJ45 jack	750
-------------------------	-----

Abmessungen

Width	482.6 mm
Depth	109.0 mm
Height	44.0 mm

Umgebungsbedingungen

Temperature Range (Operation)	-40 - 80 °C
Temperature Range (Storage)	-40 - 80 °C

Elektrische Eigenschaften

POE Standard	POE
Contact Resistance	20 mΩ
screened	False
Insulation Resistance	500 MΩ
Dielectric Withstanding Voltage	1500 V DC
Electrical strength	125 V AC RMS

Übertragungstechnische Eigenschaften


Bandwidth	250 MHz
Transmission	5 Gbit

Available variants

ArtNr.	Bezeichnung	Colour	Number of buses/couplings	RAL-number
PA11324 126	ECOLAN® Patchpanel UTP 24xRJ45 Cat.6, 19" 1U, RAL9005 black	black	24	9005

Drawings

Panel Utp Ecolan 24 RJ45 Cat-6 C/ Bandeja

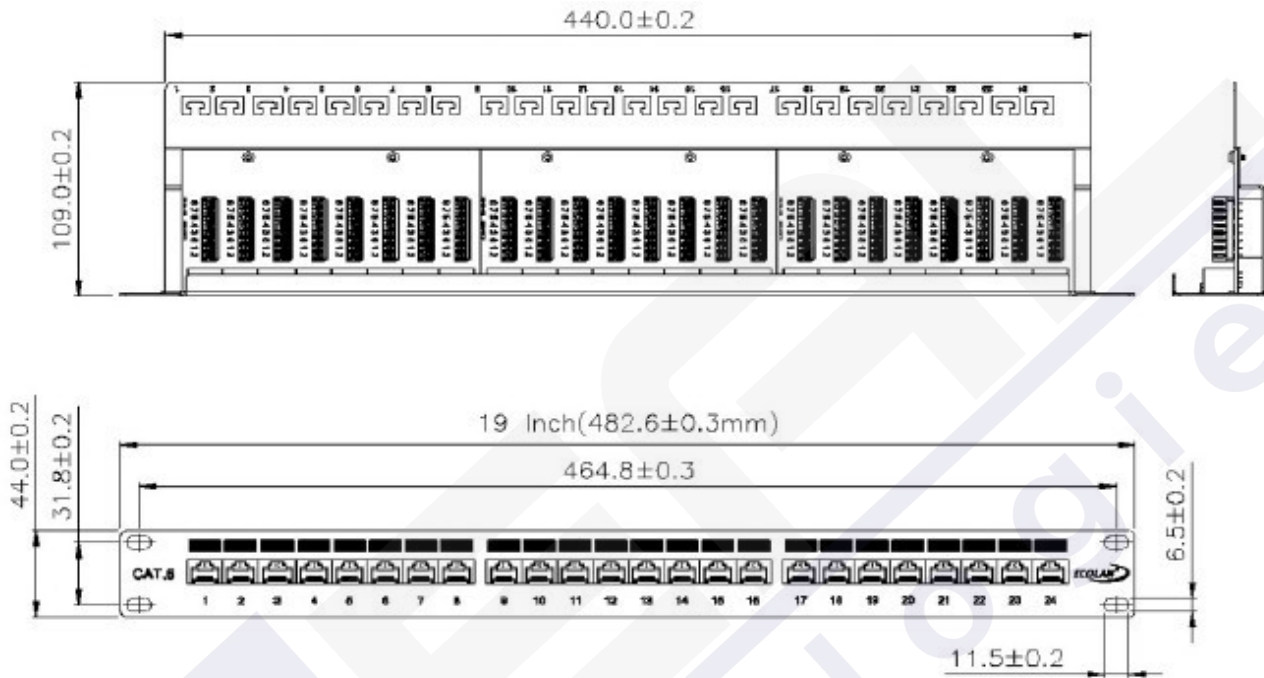

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.