



Cable Ftp Exterior Ideal Cat-6a (500m/305m)

REF: CAF6AEX

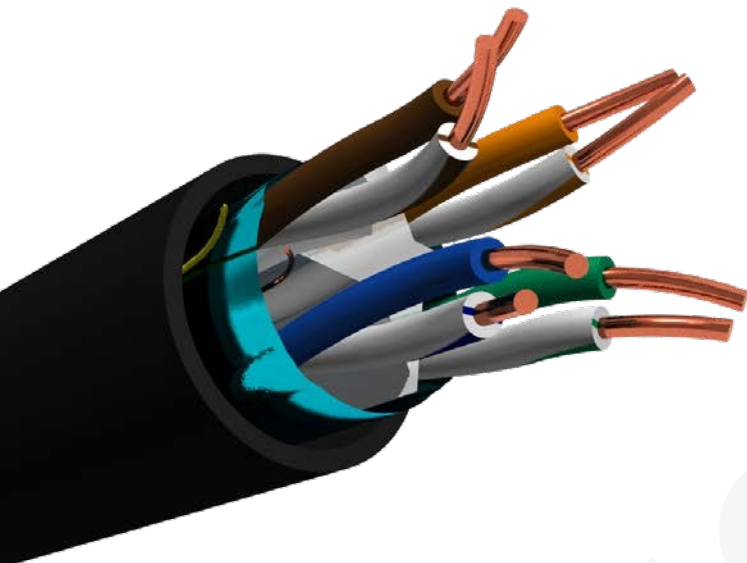

PRODUCT DESCRIPTION

• Standard Reference:

ISO/IEC 11801:2011
IEC 61156-5:2012
EN 13501-6
EN 50173-1:2011
EN 50173-2:2007 including amendment A1:2010
EN 50288-9-1:2012
EN 50288-4
EN 50575:2014+A1:2016
EN 60332-1[1,2], 60332-3C, 60754-[1,2], 61034-[1,2]
ANSI/TIA-568-6-2:2009

• Rated temperature: 90°C

• Installation temperature:

-30°C~+50°C

• Rohs/REACH complied

• Application:

VoIP, ISDN
Token, 100M TP-PDM
Analog and Data Video
TR-16 Active and Passive
115M/662m/1.2GATM
IEEE802.3: 100Base, 100Base-T,
1GBase-T

CRP Class:



TECHNICAL PERFORMANCE (100m)

Frequency (MHz)	RL(dB) min.	Attenuation (dB/100m) max.	NEXT (dB/100m)	ACR (dB)
4.0	23.0	3.7	65.27	40.00
8.0	24.5	5.2	60.75	40.00
10.0	26.8	5.9	59.30	40.00
16.0	25.0	7.4	56.24	37.96
20.0	25.0	8.3	54.78	36.99
31.5	23.6	10.5	51.88	35.05
62.5	21.5	14.9	47.36	32.04
100	20.1	19.0	44.30	30.00
200	18.0	27.5	38.30	/
300	16.8	34.2	37.10	/
500	15.2	45.3	33.80	/
Frequency (MHz)	ELFEXT (dB/100m)	PSNEXT (dB/100m)	PSELFEXT (dB/100m)	Impedance (Ohms)
4	55.76	63.27	52.76	100±15
8	49.74	58.75	46.74	
10	47.80	57.30	44.80	
16	43.72	54.24	40.72	
20	41.78	52.78	38.78	
31.5	37.90	49.88	34.90	
62.5	31.88	45.36	28.88	
100	27.80	42.30	24.80	
200	21.80	37.80	18.80	
300	18.30	35.1	15.30	
500	13.80	31.8	10.80	

CHARACTERISTICS

Max. Conductor DC Resistance at 20°C (Ω/Km)	< 93.8
Rated Temperature (°C)	75
Rated Voltage (V)	300V
Velocity Ratio	65%

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.