




Lan Cable Cat6a U/FTP CPR Cca

Application:

100 Base-TX
100VG-AnyLAN
1000Base-T(Gigabit Ethernet)ATM
Noisy Environments

Product Description:

Rated temperature:60°C, 75°C, 90°C
Reference Standard:UL444> UL1581
Bare solid copper conductor
RoHS/REACH Complied PVC PE or LSZH Jacket
Complies to ANSI/TIA-568-C.2, I SO/1 EC 11801,
EN50173&IEC61156-5
Installation temperatu:-30°C~+50°C
Minimum bending radius:8D

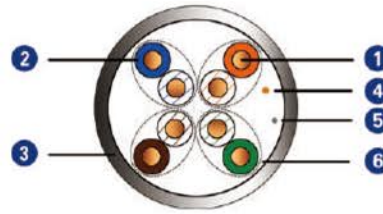

- ① Inner conductor
- ② Insulation
- ③ Jacket
- ④ Drain Wire
- ⑤ Ripcord
- ⑥ Pair shield

Electrical Properties

ConductorResistanceat20°C	NFEN50289-1-2/IEC60189-1	≤9.5Ω/100m
Resistance unbalance within a pair	NF EN 50289-1-2/ IEC 60708	≤ 5%
Dielectric Strength Test Voltage (cd/cd): 1.00KV DC or 0.7 KV AC for 1 min Test Voltage (cd/screen): 1.00KV DC or 0.7 KV AC for 1 min	NF EN 50289-1-3 / IEC 61196-1-105	No breakdown
InsulationResistanceat20°Cafter2minofelectrificationunderaDCvoltage between 100 & 500V	NF EN 50289-1-4 / IEC 60885-1	>1500 MΩ / 100m
Mutualcapacitance	NFEN50289-1-5/IEC60189-1	5600pF / 100m MAX
Capacitanceunbalancepairtogroundat800Hzor1kHz	NFEN50289-1-5/IEC60189-1	≤ 160 pF / 100m
Characteristic impedance at 100MHz	NF EN 50289-1-11/ IEC 61156-1	100 ± 5 Ω
Spark Test	UL444	2000 ± 250VOC

Transmission Properties

CAT6A ANSI/TIA-568.2-D; IEC 61156-6; YD/T1019-2013									
No.	Frequency	Attenuation(Max)	PropagationDelay (Max)	PropagationDelaySkew (Max)	ReturnLoss(Min)	NEXT(Min)	PSNEXT(Min)	EL-FEXT(Min)	PSEL-FEXT(Min)
	MHz	dB/100m	ns/100m	ns/100m	dB(on100m)	dB(on100m)	dB(on100m)	dB(on100m)	dB(on100m)
1	4	3.8	552	45	23.01	66.27	63.27	55.96	52.96
2	8	5.31	546.73	45	24.52	61.75	58.75	49.94	46.94
3	10	5.93	545.38	45	25	60.3	57.3	48	45
4	16	7.49	543	45	25	57.24	54.24	43.92	40.92
5	20	8.38	542.05	45	25	55.78	52.78	41.98	38.98
6	25	9.38	541.2	45	24.32	54.33	51.33	40.04	37.04
7	31.25	10.5	540.44	45	23.64	52.88	49.88	38.1	35.1
8	50	13.36	539.09	45	22.21	49.82	46.82	34.02	31.02
9	62.5	14.99	538.55	45	21.54	48.36	45.36	32.08	29.08
10	100	19.13	537.6	45	20.11	45.3	42.3	28	25
11	125	21.51	537.22	45	19.43	43.85	40.85	26.06	23.06
12	200	27.58	536.55	45	18	40.78	37.78	21.98	18.98
13	250	31.07	536.28	45	17.32	39.33	36.33	20.04	17.04
14	300	34.27	536.08	45	17.3	38.14	35.14	18.46	15.46
15	350	37.25	535.92	45	17.3	37.14	34.14	17.12	14.12
16	400	40.05	535.8	45	17.3	36.27	33.27	15.96	12.96
17	450	42.71	535.7	45	17.3	35.5	32.5	14.94	11.94
18	500	45.26	535.61	45	17.3	34.82	31.82	14.02	11.02

Telefono: 915 00 79 63

Calle Electrónica, 24, 28923 Alcorcón, Madrid