


Cat6A FTP keystone jacks CNHFK6A

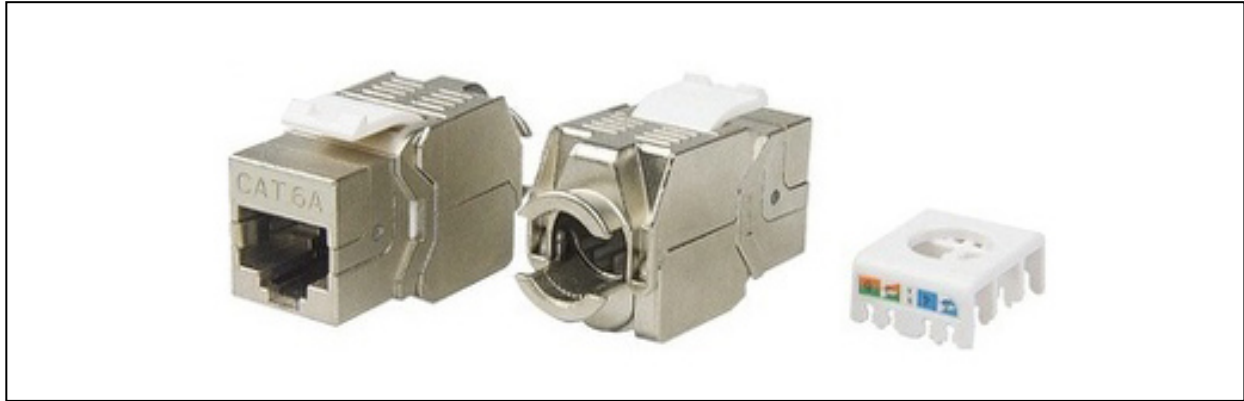

[DESCRIPTION]

- This series keystone jacks work together with high speed cables, cords and panels to provide performance beyond proposed Category 6A standards, a new feature of this series jack is a universal colored wiring label that eliminates the need for separate codes for T568A/B wiring scheme.

[APPLICATION]

- Available in Cat6A, T568A/B wiring, meet or exceed TIA/EIA Cat6A requirements
- Overall zinc alloy shielding design meets the industry standards
- Compact jack design, 8 positions and 8 conductors
- Contact : phosphor bronze , phosphor bronze with 6 to 50 μ " gold plate
- Accept 22-26 AWG solid with a insulation diameter of 0.4-0.6 mm
- Easy to be terminated, low attenuation loss and high return loss
- High reliability and superior performance
- Available in different colors

[CONSTRUCTION]

Description	Parameter
Contact resistance(max)	100m Ω
Insulation resistance (min)	500M Ω
Return loss (dB)	5.9dB