


Latiguillo Ftp Plano Ideal Cat-6a Azul Pvc



General data

The pair-shielded Cat.6A RJ45 **flat patch cable** ensures excellent performance for **10 Gigabit Ethernet** applications. The flat patch cable impresses with its flat construction and is with **2.2mm height ideal for laying e.g. behind ledges or under a carpet**. The cast grommet captivates with its **slim design** and thus simplifies the plugging process in confined spaces.

Sheath material: PVC

Cross section: 4 x 2 x **AWG30 / 7**

Cable diameter: **7.0x2.2mm**

Plug type: **short plug**

Allgemeine Daten

Connector type	RJ45 short version
Colour anti-kink sleeve	blue
Suitable for degree of protection (IP)	IP20
Fire retardant version	False
Pin assignment	1:1
Locking lever	True
Material outer sheath	Polyvinylchlorid (PVC)
Model	Shielded

Latiguillo Ftp Plano Ideal

Cat-6a Azul Pvc

Contacts	Gold plated
Allocation	acc. TIA/EIA 568B
Cable type	U/FTP
Area of Application	Industrial Ethernet
Anti-kink sleeve	plugged in
Current Rating	max. 1 A
Colour outer sheath	blue
Category	6A (TIA)
Halogen free	False

Mechanische Eigenschaften

Conductive shield	Selected shield contact
Bending radius	>20 mm
Mating cycles	2000

Kabelaufbau

Type of connector connection 2	RJ45 8(8)
AWG-size	30/7
Type of connector connection 1	RJ45 8(8)
Conductor Material	Copper
Cable construction	4x2

Kabelmantel

Oil resistant (according to EN 60811-404)	False
Silicone-free	True
Printing	SLIM PATCHCABLE U/FTP CAT.6A ***10GB***
Outer diameter of the cable	7.0*2.2 mm

Umgebungsbedingungen

Temperature range	-20 - 55 °C
-------------------	-------------

Elektrische Eigenschaften

Loop resistance	752 Ω/km
Test voltage	1000 V DC, 1min
Impedance	100 ±15 Ω
Conductor resistance DC	376 Ω/km

Latiguillo Ftp Plano Ideal Cat-6a Azul Pvc

Resistance unbalance	< 4 %
POE class	PoE+ acc. to IEEE802.3at
Operating-/ tempering voltage	max. 50 V DC
NVP value	76 %
Insulation Resistance	100 MΩ

Übertragungstechnische Eigenschaften

Bandwidth	500MHz
-----------	--------


Normen, Zulassungen, Zertifizierungen

Oil resistant (acc. EN 60811-2-1)	False
Connector	IEC 60603-7-51

Available variants

ArtNr.	Bezeichnung	Length	Längentoleranz
K5545BL.0,15	RJ45 Flat Patch cable U/FTP, Cat.6A, PVC, 0.15m, blue	0.15 m	±5 %
K5545BL.0,25	RJ45 Flat Patch cable U/FTP, Cat.6A, PVC, 0.25m, blue	0.25 m	±5 %
K5545BL.0,5	RJ45 Flat Patch cable U/FTP, Cat.6A, PVC, 0.5m, blue	0.5 m	±5 %
K5545BL.1	RJ45 Flat Patch cable U/FTP, Cat.6A, PVC, 1m, blue	1.0 m	±5 %
K5545BL.1,5	RJ45 Flat Patch cable U/FTP, Cat.6A, PVC, 1.5m, blue	1.5 m	±5 %
K5545BL.2	RJ45 Flat Patch cable U/FTP, Cat.6A, PVC, 2m, blue	2.0 m	±5 %
K5545BL.3	RJ45 Flat Patch cable U/FTP, Cat.6A, PVC, 3m, blue	3.0 m	±5 %
K5545BL.5	RJ45 Flat Patch cable U/FTP, Cat.6A, PVC, 5m, blue	5.0 m	±5 %

Drawings

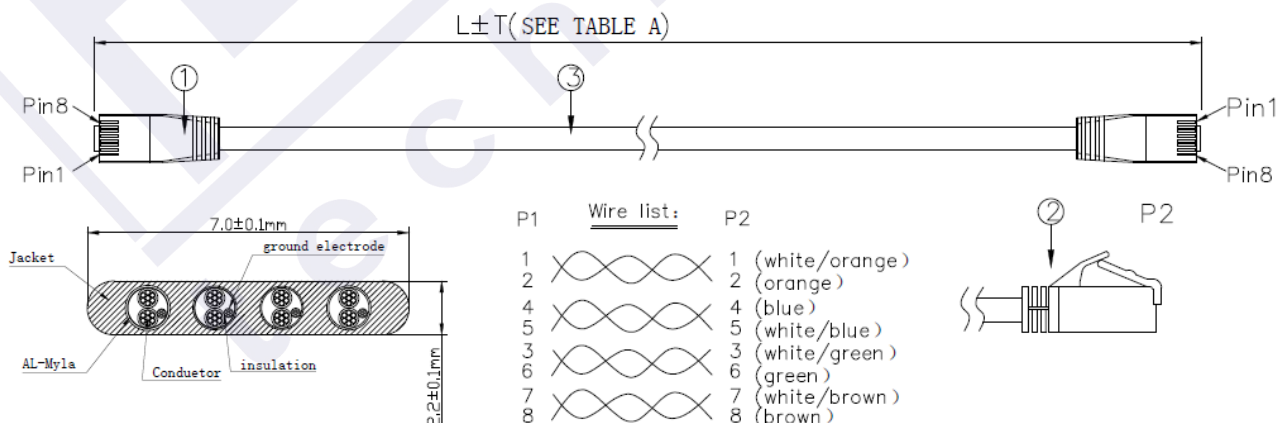

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.