


# Cable 24Fo OM3 50/125 MT.Arm.Diel.Int/Ext.LSZH Verde B2ca

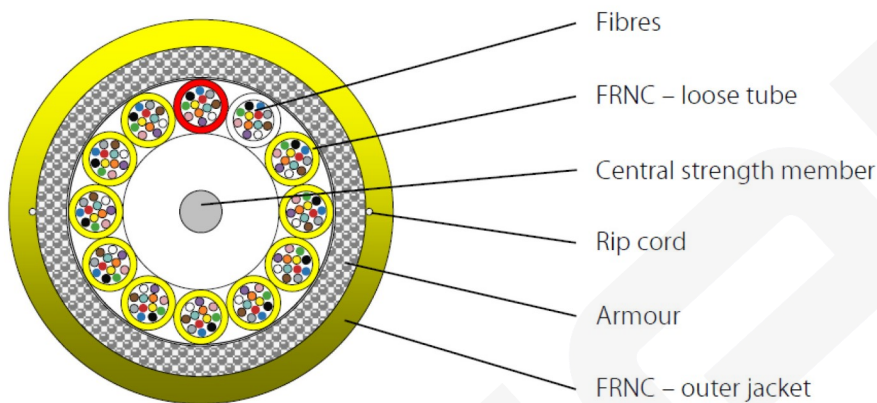

## General data

Fields of application:  
 For building connections  
 For campus cabling  
 For use in plastic pipe systems  
 For installation in cable ducts and on flatbeds

### Characteristics:

Easy to use construction  
 Gel-free cable construction for clean and fast assembly  
 Small dimensions  
 High laying stability  
 Fire behaviour tested and certified according to  
 Construction Products Regulation (see Euro fire class)

Cable diameter may vary

## Allgemeine Daten

Cable metal free	True
Armouring	True
Blow in	False
Material outer sheath	LSZH
With strain relief	True
Application	Inside
Colour outer sheath	aqua
Cable silicone free	True

# Cable 24Fo OM3 50/125 MT.Arm.Diel.Int/Ext.LSZH Verde B2ca

## Mechanische Eigenschaften

Crush resistance	1000 N/dm
------------------	-----------

### Kabelaufbau

Fibre type	Multi mode 50/125
Fibre category	OM3
Fiber marking	colour
Tube marking	colour

### Kabelmantel

Flame retardant	According to EN 60332-1-2
Euro Class	B2ca

## Umgebungsbedingungen

Temperature Range (Installation)	-5 - 50 °C
Temperature Range (Storage)	-25 - 70 °C
Temperature Range (Operation)	-25 - 60 °C

## Normen, Zulassungen, Zertifizierungen

Harmonised Standard	EN 50575
With rodent protection	True