


Cable 12Fo SM 9/125 Monotubo Arm. Diel. Int/Ext.LSZH B2ca

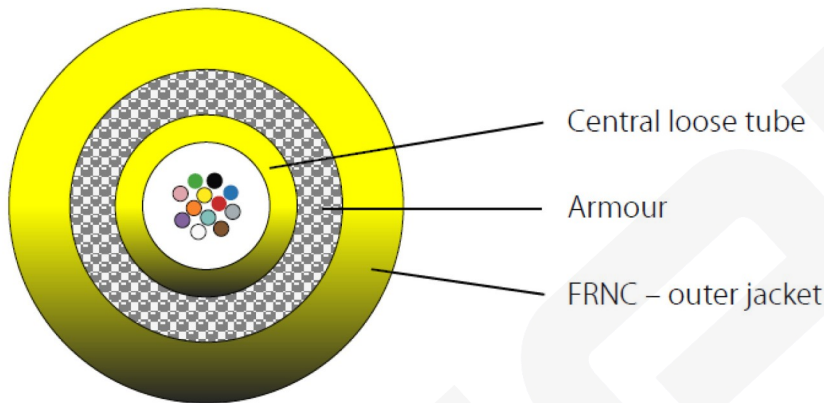

General data

Fields of application:
For building connections
For campus cabling
For use in plastic pipe systems
For installation in cable ducts and on flatbeds

Characteristics:

Easy to use construction
Gel-free cable construction for clean and fast assembly
Small dimensions
High laying stability
Fire behaviour tested and certified according to
Construction Products Regulation (see Euro fire class)

Cable diameter may vary

Allgemeine Daten

Cable metal free	True
Halogen free	acc. EN 60754-1/2
Armouring	True
Blow in	False
Material outer sheath	LSZH
With strain relief	True
Colour outer sheath	yellow
Application	Inside

Cable 12Fo SM 9/125 Monotubo Arm. Diel. Int/Ext.LSZH B2ca

Cable silicone free	True
---------------------	------

Mechanische Eigenschaften

Crush resistance	1500 N/dm
------------------	-----------

Kabelaufbau

Fiber marking	Colour
Tube marking	Colour
Fibre type	Single mode 9/125
Fibre category	G657.A1

Kabelmantel

Flame retardant	According to EN 60332-1-2
Euro Class	B2ca

Umgebungsbedingungen

Temperature Range (Installation)	-5 - 50 °C
Temperature Range (Storage)	-25 - 70 °C
Temperature Range (Operation)	-25 - 60 °C

Normen, Zulassungen, Zertifizierungen

Cabling standards	ISO/IEC 11801
Harmonised Standard	EN 50575
With rodent protection	True