

# Cable Usb 2.0 Classic Am/bm Negro



Classic



## General data

Supports data transmission rates up to 480 Mbit/s. Wire construction: AWG28 / AWG24. Shielded: folie + braiding. Plug moulded.

## Allgemeine Daten

Number of poles connection 1	4
Number of poles connection 2	4


## Kabelaufbau

Connection type connection 2	plug
Connection type connection 1	plug
Type of connector connection 2	USB-B
Type of connector connection 1	USB-A

## Available variants

ArtNr.	Bezeichnung	Colour	Length
CAB5255N0,5	USB2.0 Connection Cable A-B, M-M, 0.5m, grey, Classic	grey	0.5 m
CAB5255N1	USB2.0 Connection Cable A-B, M-M, 1.0m, grey, Classic	grey	1.0 m
CAB5255N1,5	USB2.0 Connection Cable A-B, M-M, 1.5m, grey, Classic	grey	1.5 m
CAB5255N1,8	USB2.0 Connection Cable A-B, M-M, 1.8m, grey, Classic	grey	1.8 m
CAB5255N3	USB2.0 Connection Cable A-B, M-M, 3.0m, grey, Classic	grey	3.0 m
CAB5255N5	USB2.0 Connection Cable A-B, M-M, 5.0m, grey, Classic	grey	5.0 m

# Cable Usb 2.0 Classic Am/bm Negro

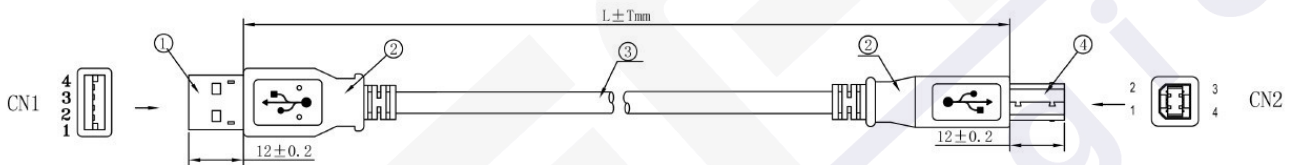

**NOTE:** 1. PRINTING: AWM 80° C 30V VW-1 28AWGx1P  
24AWGx2C USB2.0 HIGHSPEED CABLE  
2. RoHS compliant.  
3. Operating Temperature: -15°C-80°C

4	CONNECTOR	USB B TYPE MALE, NICKEL PLATED SHELL, 1U" GOLD PLATED PIN, WHITE INSULATOR	1 Set
3	CABLE	28AWG*1P+24AWG*2C+AL+B USB2.0 HIGHSPEED CABLE JACKET: PVC/GREY OD: 4.5 ± 0.2mm	1
2	OVERMOLD	PVC COLOR: GREY	10g
1	CONNECTOR	USB A TYPE MALE, NICKEL PLATED SHELL, 1U" GOLD PLATED PIN, WHITE INSULATOR	1 Set
NO.	MAT. NAME	DESCRIPTION	Q' TY

NOTE 1:

GREY	
ITEM NO.	LENGTH
CAB5255N0,5	500 ± 5mm
CAB5255N1	1000 ± 10mm
CAB5255N1,5	1500 ± 15mm
CAB5255N1,8	1800 ± 18mm
CAB5255N3	3000 ± 30mm
CAB5255N5	5000 ± 50mm

